


# AB48 HRST All Terrain Boom Platform Lift




When the going gets tough, you can rely on the **AB48 HRST** to see you through. The powerful engine and four-speed gearbox provide a top speed of 22km/hr, supported by four wheel-drive and high grip tyres for extra traction over the roughest terrain. Ideal for off-road applications, the platform can support two people with tools. The boom offers a safe working height of 16.8 metres and outreach of 7.9 metres. This excellent 'up-and-over' capacity is boosted by an articulating jib for that extra versatility where you need it most.

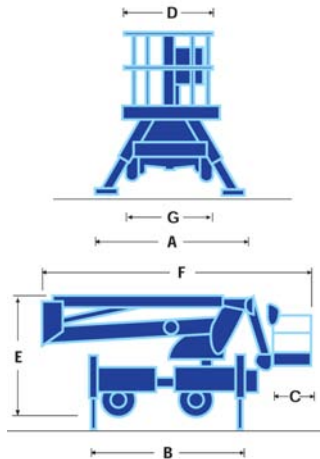

## Features

- Max. Working Height: 16.8m (55ft)
- Max Outreach: 7.9m (25ft 9ins)
- Max. Platform Height: 14.8m (48ft 6ins)
- Two Person, 215kg capacity platform
- 1.4m (4ft 6ins), 140° Jib
- 90° Powered Platform Rotation
- 4 Wheel Drive and High Grip Tyres
- Flotation Tyres and Larger Levelling Outrigger Feet - outrigger footprint 2.40m (7ft 9ins) (A) x 3.60m (11ft 8ins) (B) Permanent Hydrostatic 4 Wheel Drive
- 4 Forward and 4 Reverse Gears
- Grade-ability: 40%
- 22kmh Drive Speed
- Articulating / Telescopic Boom with 1.4m (4ft 6ins), 140° Jib
- Gross Weight: 3500kg
- 90° Hydraulically Powered Platform Rotation
- Hand Pump Emergency Lowering from Platform
- Lock Valves on all Hydraulic Cylinders
- Proportional Live Hydraulic Controls at ground and basket
- 32 HP Two Cylinder (water cooled) Diesel Engine
- 12V Auxiliary Battery Power
- Hydraulic Power Take-off at Platform
- GRP Platform - Platform Depth C: 0.80m (2ft 6ins) – Platform Width D 1.20m (3ft 9ins)
- Travel Height E: 2.75m (9ft) - Travel Length F: 6.10m (20ft) - Travel Width G: 1.90m (6ft 2ins)
- Gross Weight: 3500kg

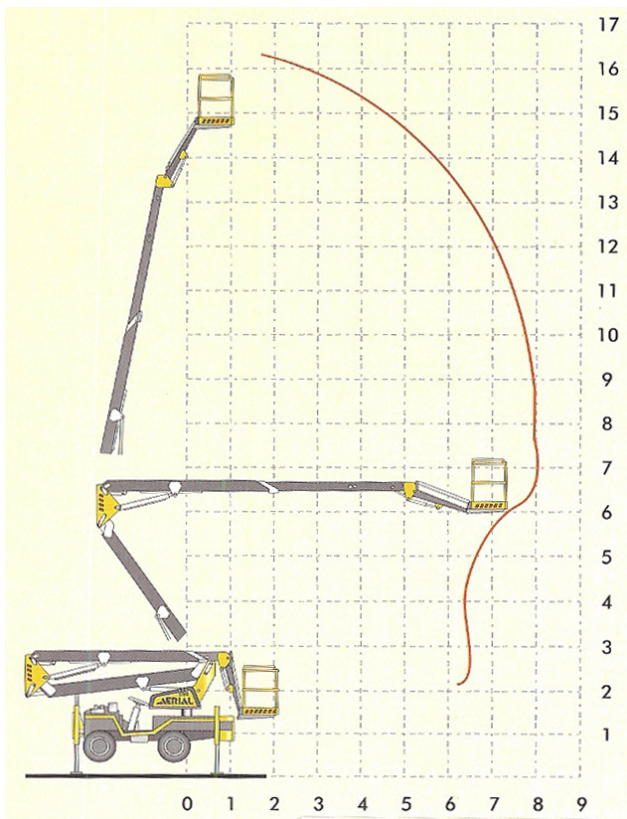

**CE** This product is available with the CE mark confirming compliance with all relevant European Machinery Directives