

# MX19 Micro Scissor Lift Technical Specifications




The **MX19** is the original **Micro Scissor Lift** and remains the professional's choice. This ultra-compact, self-propelled machine has an extremely tight turning circle, providing superb manoeuvrability, yet still offering a safe and effective working height of 7.8 metres. Standard features include non-marking tyres and roll-out deck extension for extra platform space where required.



## Features

- Max. Working Height **A**: 7.8m (25ft 6ins)
- Max. Platform Height **B**: 5.8m (19ft)
- Max. Drive Height: 5.8m (19ft)
- Platform Capacity (SWL): 227kg
- Roll-out Deck Extension with foot pedal release (ground view grates extension)
- Platform Size (inside - with deck extended): 0.72m x 2.54m (2ft 4ins x 8ft 3ins)
- Stowed Height **C**: 2.13m (7ft)
- Folding Guardrails - with guardrails lowered 1.6m (5ft 2ins)
- Stowed Length **D**: 1.75m (5ft 7ins)
- With steps removed: 1.6m (5ft 2ins)
- Width **E**: 0.76m (2ft 5ins)
- Gross Weight: 1,460kg
- Max. Drive Speed: 3.7km/h
- With platform raised: 1km/h
- Grade-ability: 14° / 25%
- Inside Turning Radius: 0.15m (5ins)
- Ground Clearance: 95mm (3ins)
- Selectable Motion/alarm
- Lift Speed - raise/lower 19/18 seconds
- Drive System dual front wheel hydraulic motors
- Tyres 305mm dia. solid rubber, non-marking
- Battery Charger: 25 amp 90V - 240V automatic with ammeter
- Parking Brake 2 wheel, spring-applied hydraulic release and manual release
- Control System smooth, one-hand proportional controls
- AC Power to Platform - power source 24V 4hp DC electric motor  
4 x 6V 220 Ah batteries
- Side Forklift Pockets
- Swing-out service modules
- Tilt Alarm, Ascent Alarm
- Lift-up rear guardrail to ease loading
- Hour Meter
- Horn, push button on controller

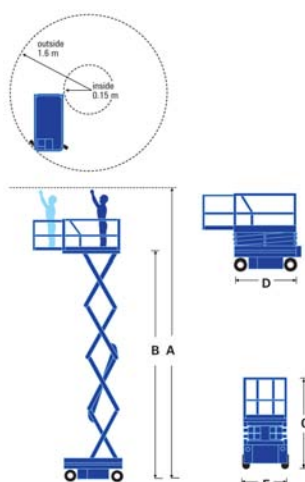

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

LAT Access Ltd. Creech Mills Industrial Estate Taunton Somerset TA3 5PX

T 01823 413327 F 01823 444662 E [lataccess@btopenworld.com](mailto:lataccess@btopenworld.com) W [www.lataccess.co.uk](http://www.lataccess.co.uk)