

# SL26 Speed Level Technical Specifications




The **SL26 Speed Level** has a working height of up to 10m and has automatic platform levelling on slopes or uneven ground. It has rough terrain features that include 4WD, an oscillating front axle and high grip tyres providing 19°/35% grade-ability. The diesel powered SL26 also has proportional drive/lift controls for smooth precise operation.



## Features

- Max. Working Height **A**: 10m (32ft 8ins)
- Max. Platform Height **B**: 8m (26ft 2ins)
- Max. Drive Height: 8m (26ft 2ins)
- Platform Capacity (SWL): 680kg
- Platform Size (inside guardrails): 1.72m x 3.66m (5ft 6ins x 12ft)
- Platform Size (with deck extended): 1.72m x 4.23m (5ft 6ins x 13ft 9ins)
- Stowed Height **C**: 2.6m (8ft 5ins)
- Stowed Length **D**: 3.79m (12ft 4ins)
- Width **E**: 2.13m (7ft)
- Wheelbase **F**: 2.54m (8ft 3ins)
- Height (guardrails folded): 1.1m (3ft 6ins)
- Gross Weight: 3,150kg
- Drive Speed - max 5.0km/h with platform raised 0.8km/h
- Grade-ability: 19°/ 35%
- Inside Turning Radius: 3.9m (12ft 8ins)
- Axle Ground Clearance: 200mm (7ins)
- Chassis Ground Clearance: 320mm (1ft)
- Lift Speed - raise/lower 21/32 sec
- Drive System four-wheel with hydraulic motors
- Platform Levelling 13° to either side; 9° fore and aft
- Tyres: 26 x 12.00 - 12 NHS. Super Terra-Grip, poly-filled
- Parking Brake spring-applied/hydraulically-released, multiple disc
- Control System proportional, joystick controller with thumb rocker steering. Automatic levelling control (inoperable above interlock height)
- Power Source Perkins diesel, water cooled engine

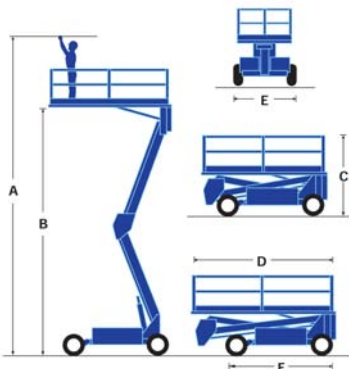

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

LAT Access Ltd. Creech Mills Industrial Estate Taunton Somerset TA3 5PX

T 01823 413327 F 01823 444662 E [lataccess@bopenworld.com](mailto:lataccess@bopenworld.com) W [www.lataccess.co.uk](http://www.lataccess.co.uk)